



BOBBIN CASE, CAP

Prevents Bobbin from Spinning
after Machine is Stopped.

For High Speed Machines, Automatic Underbed
Thread Trimming Machines and Chemical fiber
threads.

NBL SPRING		SUMMARY		NBL SPRING		SUMMARY	
NBL-101 (396)				NBL-401 (522-1)			
	203NBL	BC-HZ3(NS)-NBL			601NBL1	BC-DB1-NBL1	
	208NBL	BC-HZ8-NBL			611-1	BC-770-NBL1	
	501NBL	BC-71(1)-NBL					
	502NBL	BC-71(2)-NBL					
	503NBL	BC-269-NBL					
	501NBL	BC-LK(B)-NBL		NBL-402 (522-2)			
	510-2	BC-LK(B2)			601NBL2	BC-DB1-NBL2	
	510-3	BC-LK(B3)			2002NBL	BC-UN614E-NBL	
	511NBL	BC-LK(J)-NBL					
901NBL	BC-PF244-NBL						
NBL-406 (522-6)				NBL-404 (522-4)			
	601NBL6	BC-DB1-NBL6			604NBL4	BC-251-NBL	
	609NBL6	BC-DBZ(1)-NBL9			605NBL4	BC-402-NBL	
	612NBL	BC-241-NBL			606NBL4	BC-DLN-NBL	
	615NBL	BC-DBZ(3)-NBL6					
	616NBL6	BC-AD396-NBL6					
	1001NBL	BC-DU211-NBL					
	2003	BC-UN639(SS)		NBL-409 (522-9) Beryllium copper			

NBL-603(502)

701NBL	BC-107(1)-NBL
702NBL	BC-107(2)-NBL
704NBL	BC-102-NBL
705NBL	BC-457-NBL
706NBL	BC-271-NBL
710NBL	BC-LBH771-NBL
908NBL	BC-PF3114-NBL



609NBL9	BC-DBZ(1)-NBL9
615NBL9	BC-DBZ(3)-NBL9

NBL-806 (907)

903NBL	BC-PF9076-NBL
906NBL	BC-696-NBL

NBL-1302 (509004) Beryllium copper

801NBL2	BC-DB??1?-NBL2
803NBL2	BC-DBM(Z2)-NBL2
807NBL2	BC-DBM(3)-NBL2

NBL-1303

801NBL1	BC-DBM(1)-NBL1
806NBL1	BC-DBM(2)-NBL1



801NBL3	BC-DBM(1)-NBL3
802NBL3	BC-DBM(Z1)-NBL3
809NBL3	BC-DBM(4)-NBL3
811NBL3	BC-DBM(6)-NBL3
812NBL3	BC-NJ280L-NBL3

NBL-1304**NOW PRINTING**

810NBL4	BC-DBM(5)-NBL4
---------	----------------



803NBL5	BC-DBM(Z2)-NBL5
---------	-----------------

NBL-1310**NOW PRINTING**



910	BC-PF418
1006NS	BC-DU265BIG(NS)-NBL

The strength of the NBL Spring can be adjusted on any level which you want.

1) How to take off the NBL Spring.

2) Bend the ends of the Spring suitably.

3) How to set the NBL Spring.

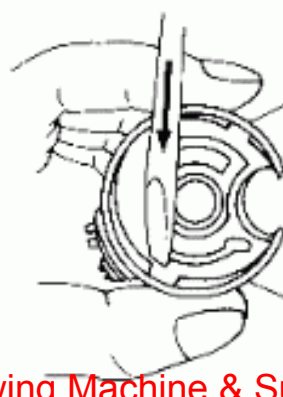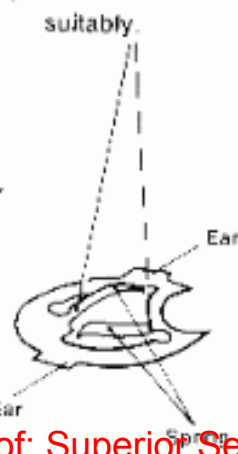

1 Insert one of the NBL spring's Ears into one slot of bobbin case body.

2 Insert the another Ear into the another slot.

From the library of: Superior Sewing Machine & Supply LLC